

DRAINAGE PLANNING RETENTION ROOF FLOW CONTROL

Date:

General information about the project:

Company:

Contact person: Telephone:

Street: Mobile:

Postcode / Town: E-mail:

Project name:

Street:

Postcode / Town: Optigrün Object-No.:

Planning requirements:

Requested max. discharge rate: l/s
 or other specification: (e.g. required m³/cbm)

Roof pitch Retention Roof Flow Control: requirement 0° (degree)

Roof pitch other roof surfaces: in degree (e.g. Meander Roofs)

Flooding test according to DIN 1986/100: Yes No

If so, required annuality: 30 years 100 years If not, annuality 5 years

Roof loads:

Permanent roof loads:

Max. distributed load kg/m²

Information about the maximum traffic load:

Roof description:	Max. traffic load on the roof:
<input type="text"/>	<input type="text"/>
<input type="text"/>	<input type="text"/>
<input type="text"/>	<input type="text"/>
<input type="text"/>	<input type="text"/>

We also require the following planning documents relating to the building in order to process your application quickly and efficiently:

Top view of the roof with measurements and with necessary contents, see example plan page 2.

Detailed planning documents are essential for a binding execution planning. Please send the necessary data in digital form (if possible dwg or vwx) together with the completed checklist to the following e-mail address:

retention@optigruen.de

Note: One preparation per work phase by the Optigrün Application Technology is free of charge for you. For other versions or modifications Optigrün will invoice 250 €.

Optigrün international AG

Am Birkenstock 15 - 19, 72505 Krauchenwies-Göggingen, Germany
 Phone +49 7576 772-0, info@optigruen.de


AWTF.015 - CHECKLIST

APPLICATION EXAMPLE

Name of the catchment area	Substrate in mm ¹⁾	Number of roof drains	Drained to	Type of surface	Roof structure 3,4,5,6)	Surface in m ²	Surface with WRB ²⁾
Roof A	120	2	Underground parking	Green roof	UKD	138	<input type="checkbox"/>
Roof A				Gravel/pebble		220	<input type="checkbox"/>
Roof A				Maintenance path (concrete slabs)		12	<input type="checkbox"/>
Roof A				Attica		40	<input type="checkbox"/>
Roof B	80	1	Underground parking	Green roof	WaD	122	<input type="checkbox"/>
Roof B				Gravel/pebble		52	<input type="checkbox"/>
Roof B				Attica, skylights		21	<input type="checkbox"/>
Underground parking	350	3	Trenching	Green roof	UgD	175	<input type="checkbox"/>
Underground parking				Surface type (paving, concrete slab, waterbound covering, etc.)		210	<input type="checkbox"/>
Underground parking				Gravel/pebble		45	<input type="checkbox"/>

Please specify k_f value for trenching:	$5 \cdot 10^{-4} - 5 \cdot 10^{-5}$	m/s
Potentially possible area of the trenching:	20	m ²

- All areas in m², green areas incl. substrate height in mm
- Trenching with k_f value and potentially possible area

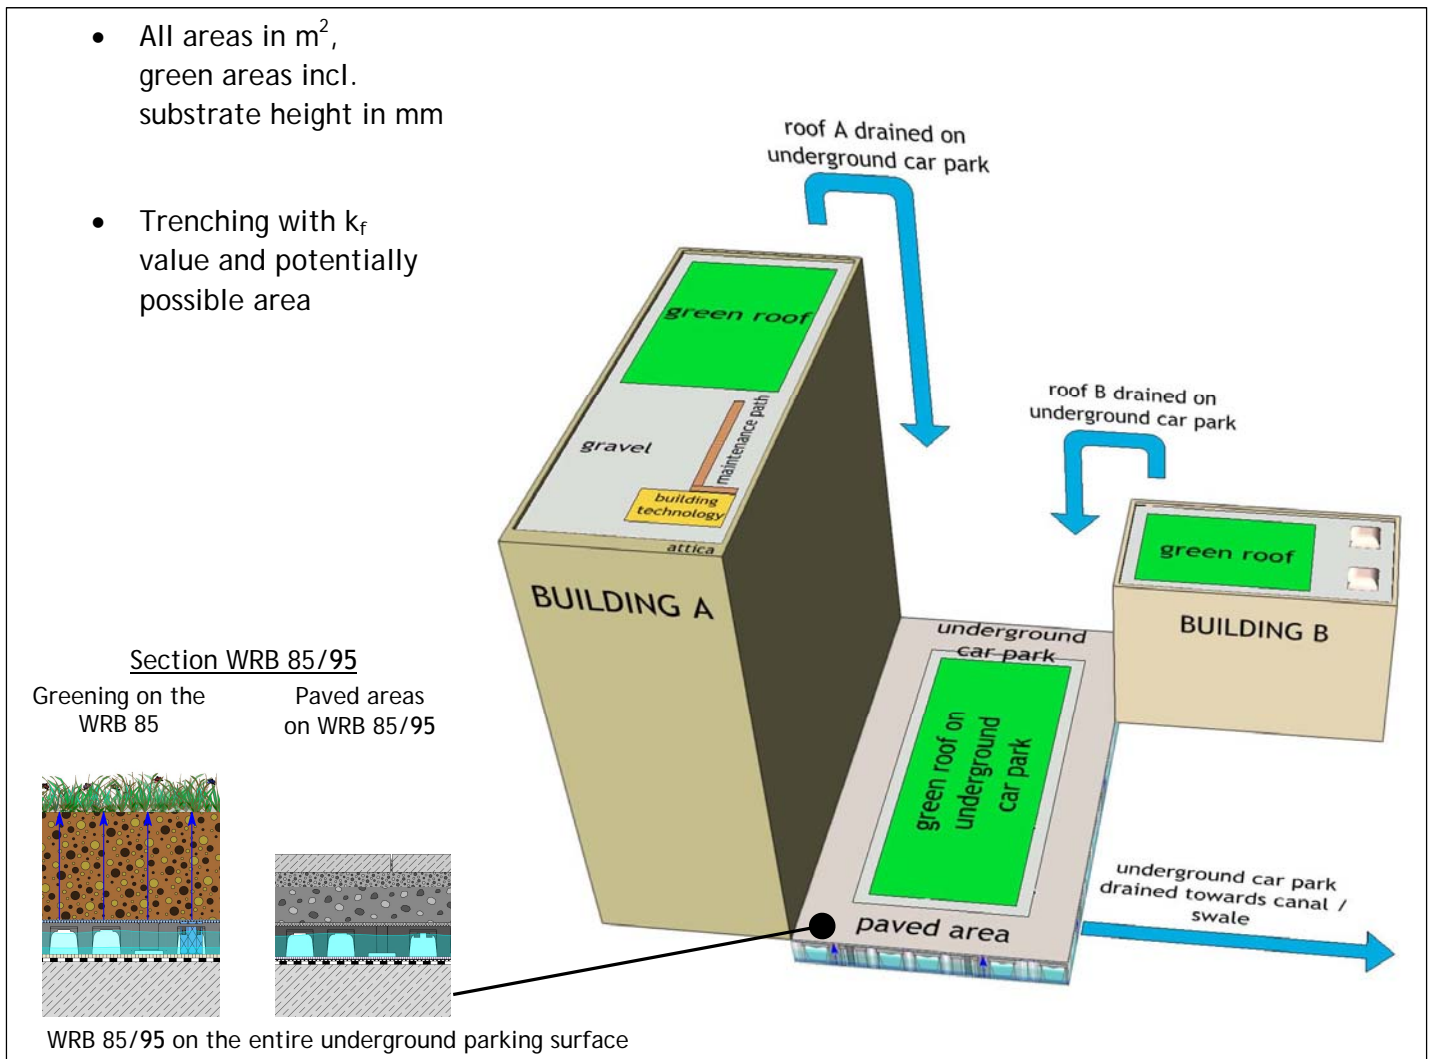

Optigrün international AG

Am Birkenstock 15 - 19, 72505 Krauchenwies-Göggingen, Germany
Phone +49 7576 772-0, info@optigruen.de

